


CEZOS

Q0-081081-xxx-C1800-K219

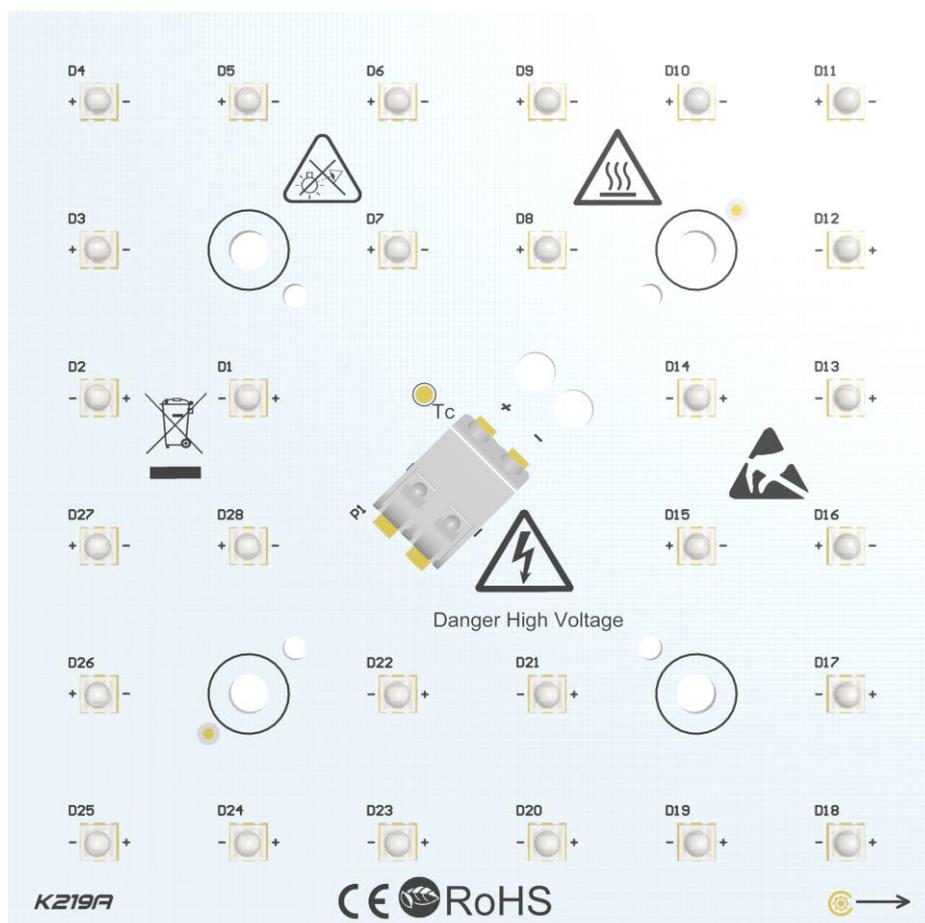

INTRODUCTION

Street LED module is an advanced light source designed for the best energy efficient and eco-friendly outdoor lighting, with additional weather protection. It is based on medium power LEDs produced by the leader of the LED technology OSRAM. Using newest technology we provide the best solution for lighting. With a very high value of CRI and simple installation. Optional push terminals provide quick installation of the entire lighting system. This solution is the best for street lamps, parking lamps etc.

LED Type	OSLON Square - GW CSSRM2
LED Quantity	28 pcs
Dimension	81x81 mm
Power Supply Type	Constant Current (CC)
Input Current	max. 1800 mA
Material Thickness	1,5 mm
Cable Connection	ADELS 351102
Max Ambient Temperature	45°C
CRI	>70


FEATURES

LEDs have significant advantages compared to other types of lighting and are easy to use. LEDs are versatile and virtually maintenance free.

- Efficiency of the module up to 173 lm/W @ 350mA
- Rigid board LED module
- High colour rendering index CRI >70
- Small colour tolerance
- Small luminous flux tolerances
- Colour temperatures 2700K, 3000K, 4000K, 5000K
- Solder pads for quick and simple wiring
- Simple installation
- Long lifetime

APPLICATIONS

- Street and parking lamps

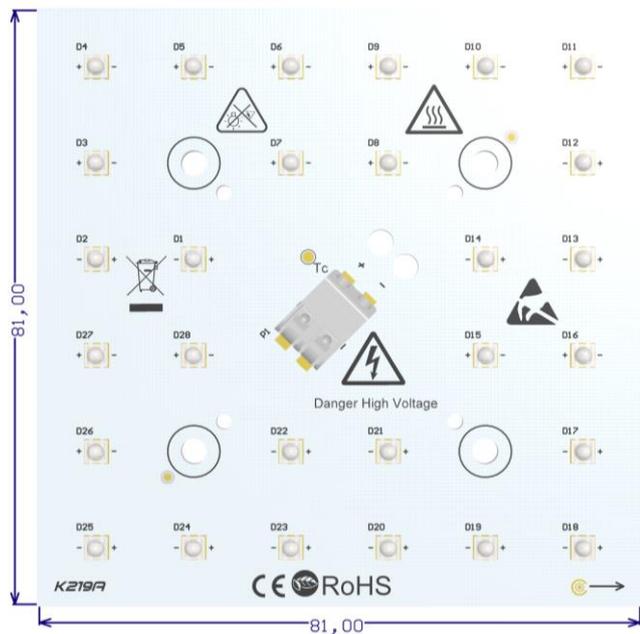

STREET LED MODULES

Street LED modules are specially designed LED light source for street lamp, parking lamps etc. They consist of a suitable optic and LED module, generally in the shape of rectangle or square. Shape of LED light source allow to place them close to each other's, so LED modules may be better adapted to the existing or projected lamp. Street LED allow to use different types of optics with same LED light source. This enable selecting proper angle of illumination. Additionally, in case of some Street LED modules and optics it is possible to change view direction.

CALCULATED PARAMETERS AT T_J = 25°C AND T_J = 65°C

Input Current [mA]	Forward Voltage [V]	Power [W]	CCT [K]	Typ. CRI	Luminous Flux* [lm]	Module Efficacy* [lm/W]	Luminous Flux** [lm]	Module Efficacy** [lm/W]	Article Number
350	80,9	28,3	2700	82	3784	134	3608	130	Q0-081081-827-C1800-K219
			3000	72	4670	162	4534	161	Q0-081081-730-C1800-K219
				82	3945	139	3762	136	Q0-081081-830-C1800-K219
			4000	72	4828	168	4687	166	Q0-081081-740-C1800-K219
				82	4106	145	3915	141	Q0-081081-840-C1800-K219
			5000	72	4987	173	4841	171	Q0-081081-750-C1800-K219
82	4267	151		4069	147	Q0-081081-850-C1800-K219			
700	84,7	59,3	2700	82	7012	118	6675	115	Q0-081081-827-C1800-K219
			3000	72	8698	147	8431	145	Q0-081081-730-C1800-K219
				82	7311	123	6960	120	Q0-081081-830-C1800-K219
			4000	72	8993	152	8716	150	Q0-081081-740-C1800-K219
				82	7609	128	7244	125	Q0-081081-840-C1800-K219
			5000	72	9288	157	9002	155	Q0-081081-750-C1800-K219
82	7908	133		7528	129	Q0-081081-850-C1800-K219			
1050	87,9	92,3	2700	82	9933	108	9438	104	Q0-081081-827-C1800-K219
			3000	72	12374	136	11974	134	Q0-081081-730-C1800-K219
				82	10356	112	9840	109	Q0-081081-830-C1800-K219
			4000	72	12794	140	12380	138	Q0-081081-740-C1800-K219
				82	10779	117	10241	113	Q0-081081-840-C1800-K219
			5000	72	13213	145	12786	143	Q0-081081-750-C1800-K219
82	11201	121		10643	118	Q0-081081-850-C1800-K219			

* - Parameters were calculated for temperatures T_J= 25°C


** - Parameters were calculated for temperatures T_J= 65°C

Value of these parameters were calculated for default bin and with tolerances of 15%.

Parameters shown in table above are default and for temperatures T_J=25°C and T_J=65°C. Some of these parameters are temperature dependent and can be different during long time of operation. So it is impossible to order modules with the same parameters after some time. LED technology is developed fast and producers are creating new LEDs with better features very quick. If you need LED modules with different value of some parameters, we provide other LEDs with different colour temperature and features. It is possible to make modification of LED modules or create a new one. In such cases and for more information, please contact us before ordering. Please have all of this in mind when ordering LED modules.

MACADAM ELLIPSE

Producing LEDs with the same colour temperature is almost impossible. LEDs with similar colours are divided into bins. MacAdam Ellipses are used to describe differences in colour of LEDs with the same bin. When most people can't see very small differences in colours, these colours are in first step level of MacAdam Ellipse (1SDCM). If the differences are getting bigger, then number of step is increasing. Second zone of MacAdam ellipse (2SDCM) is twice bigger than first one and so on. Differences in colour for 3000K LEDs can be up to $\pm 30K$ in 1SDCM. If bin is in 4SDCM, then colour differences should be less than $\pm 100K$. LEDs with smaller number of SDCM are better. Most common LEDs are in 4th to 7th step level, in other words human eyes certainly can see colour differences in LEDs that are ostensibly the same colour. In most of our projects have been used LEDs in 3rd step level, so differences in colour aren't as big as fourth step level of MacAdam Ellipse.

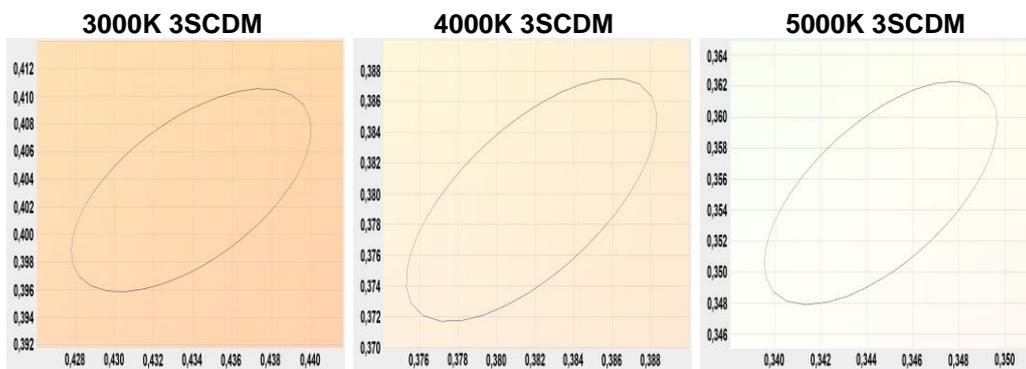**SAFETY**

Most of LEDs generate high intensity light even when dimmed. If LED light has high intensity, it is classified as laser. These LEDs must have appropriate marking. Combination of LEDs or even weak LEDs with optics can be very dangerous, because optics can focus beam and looking into LEDs beam is unhealthy and may cause irreversible injury to eye's retina. Never look into the beam without protection glasses with appropriate filter.

Additionally LED light can change intensity almost immediately. If people are photosensitive, LED light may be a trigger to epileptic seizures and alter the perception, especially when light changes very fast.

PROTECTION MEASURES AGAINST DAMAGE

LED modules are delicate, even small mechanical stress may damage modules. Especially sensitive are LEDs. Such stresses should be avoided. If it is impossible, it should be reduced to minimum. Mechanical stresses such as pressure, bending, breaking, drilling, etc. may cause irreversible damage. Damaged LED modules aren't suitable for use.

Serious threat to LEDs is ESD. People generate very high electrostatic voltage. Such voltage decreases lifetime of LEDs and in worst case may destroy electronic components. Best way to avoid damage is use of electrostatic protection. Do not touch electronic components.


Additionally LED modules can be damaged by some chemical substances. Depends of elements the damage may be different. It is important not to use chemical substances like acids, organic acids, sulphur, alkalis, organic solvents, mineral oils, vegetable oils and synthetic oils, etc. We are not responsible for any loss, or damage resulting from improper use of modules! Guarantee become void in such cases.

Do not operate LED modules, when they aren't working properly. If modules are working incorrectly, turn off power supply. Damaged LED modules may cause electric shock or short circuit.

CONNECTIONS

Connecting few Steer LED modules allows to adapt lamp in most effective way. Push terminals provide quick installation of the entire lamp. The LED modules must be operated with power supply that is suitable for LEDs. When connecting a few LED modules use of appropriate power supply is important. Power supply should have sufficient maximum power to maintain all LED modules. Power supply must be connected properly. Wrong polarization can destroy modules in very short time. We are not responsible for any loss, or damage resulting from improper use of modules! Guarantee become void in such cases.


WIRING DIAGRAM FOR STREET LED CC MODULES WITH SERIAL WIRING AND SERIAL-PARALLEL WIRING

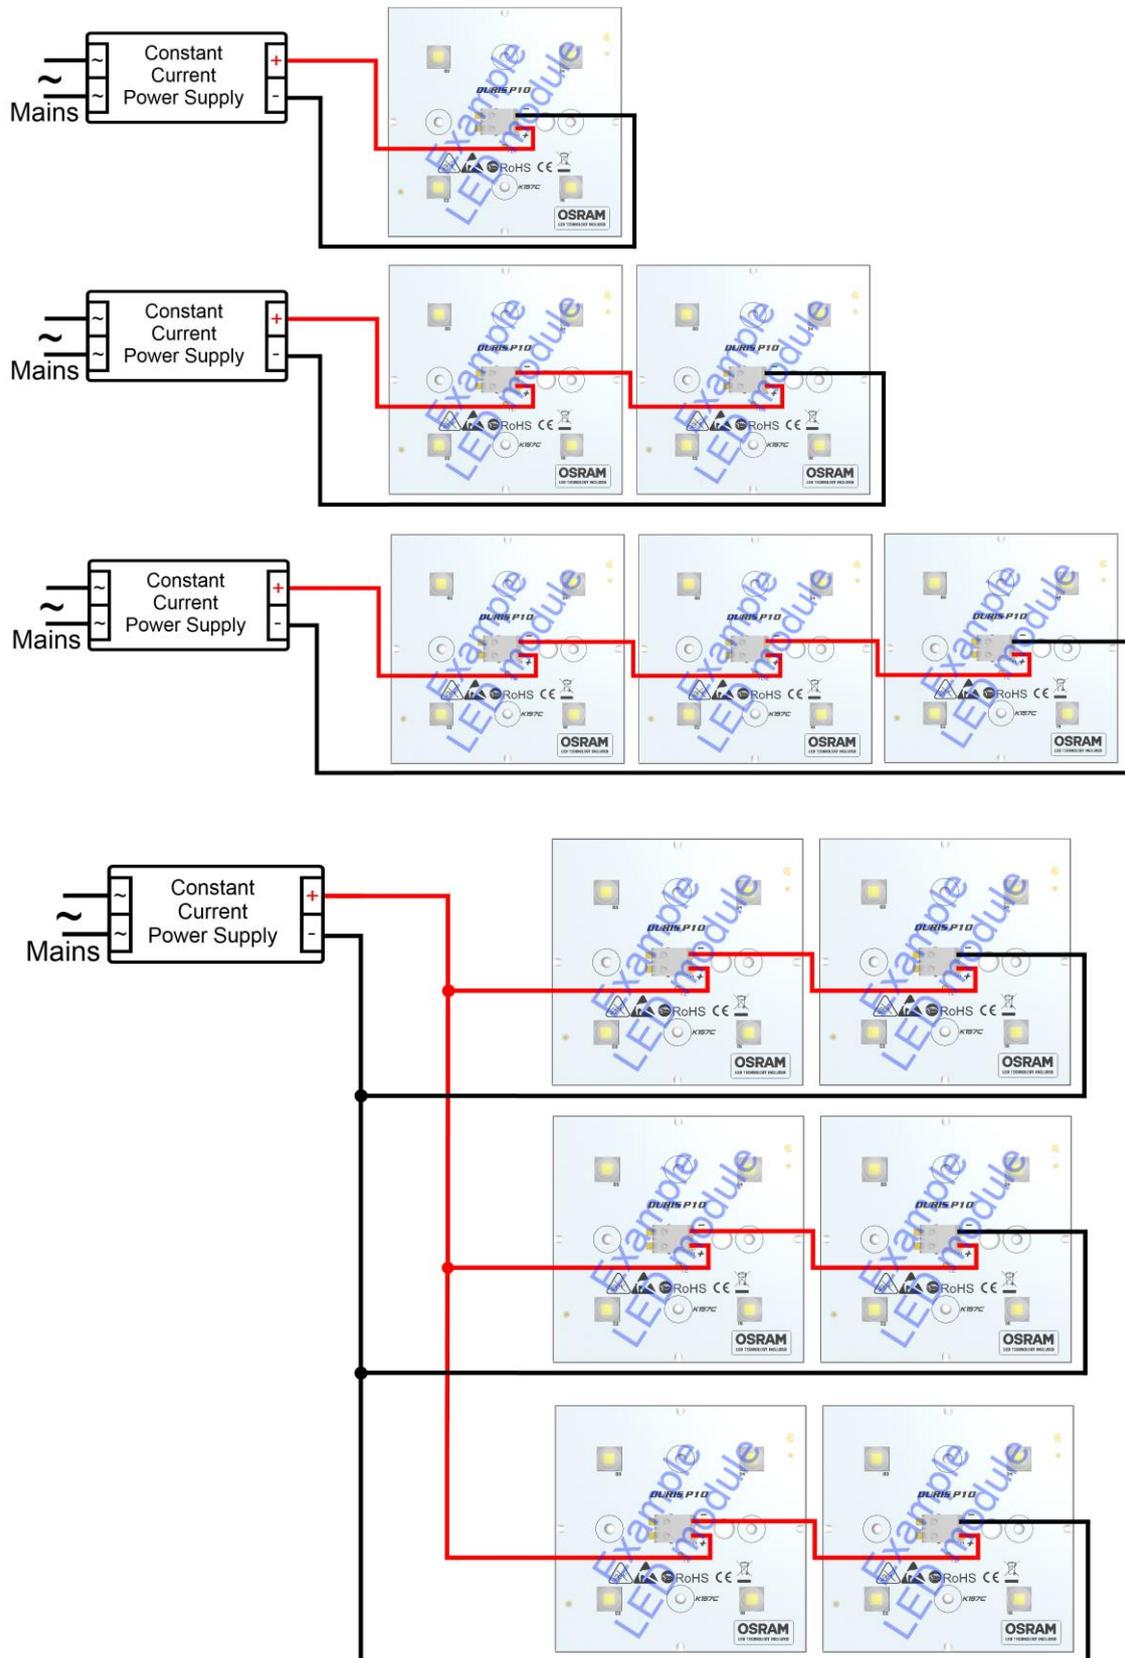


Street LED modules may be connected with serial or serial - parallel wiring. Above connections are example and may be different from the actual.

COOLING

The modules are usually self-cooling but if temperature on T_c point exceeds 70°C , then a heat-sink is required. Temperature test point (T_c) for measurement should be localized in the middle of the board near LED's thermal pad. The temperature at the T_c point can be measured with thermocouple or simple temperature probe. Example of T_c point is shown on the photo below.

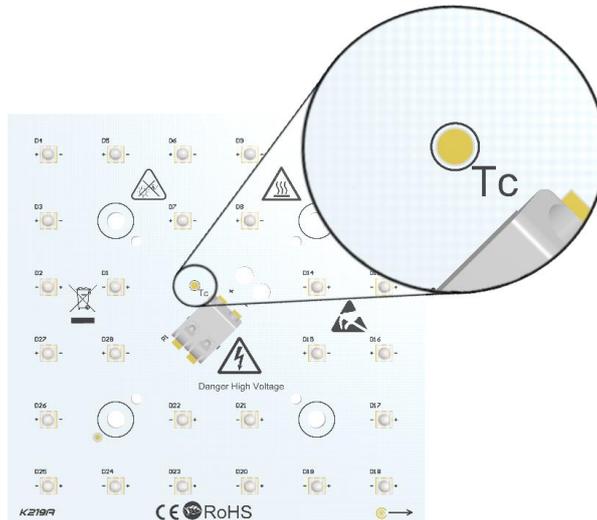


The lifetime of the module depends to operating temperature and used LEDs. If temperature at T_c will be lower than 65°C , the value of luminous flux shouldn't be less than 80% of its nominal value after 50.000h. If temperature is too high then lifetime can be significantly decreased or damage LEDs. Another disadvantage of high temperature is reduction of relative luminous intensity. LED modules produces heat. They must be provided with good air ventilation. Modules without air ventilation can overheat. Overheat can damage or destroy some elements or entire LED modules. We are not responsible for any loss, or damage resulting from improper use of modules! Guarantee become void in such cases.

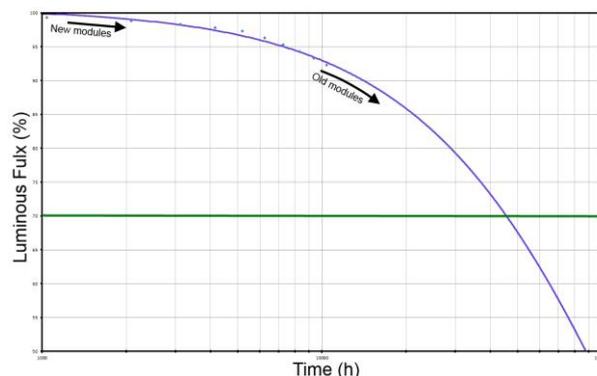

Most common problem using new modules in old installation is differences in brightness of modules. This is result of luminous flux degradation over time of use. Degradation is normal effect and applies to all LEDs. This effect is different for each LEDs and can be only predicted by testing and estimation. It is complicate issue that mostly depends on temperature and current. Good solution to this problem is reduce of current in new modules, but degradation will be different for each modules. Above characteristic is examples for LEDs in temperature above 100°C and different from the actual.

DESCRIPTION OF ARTICLE NUMBER

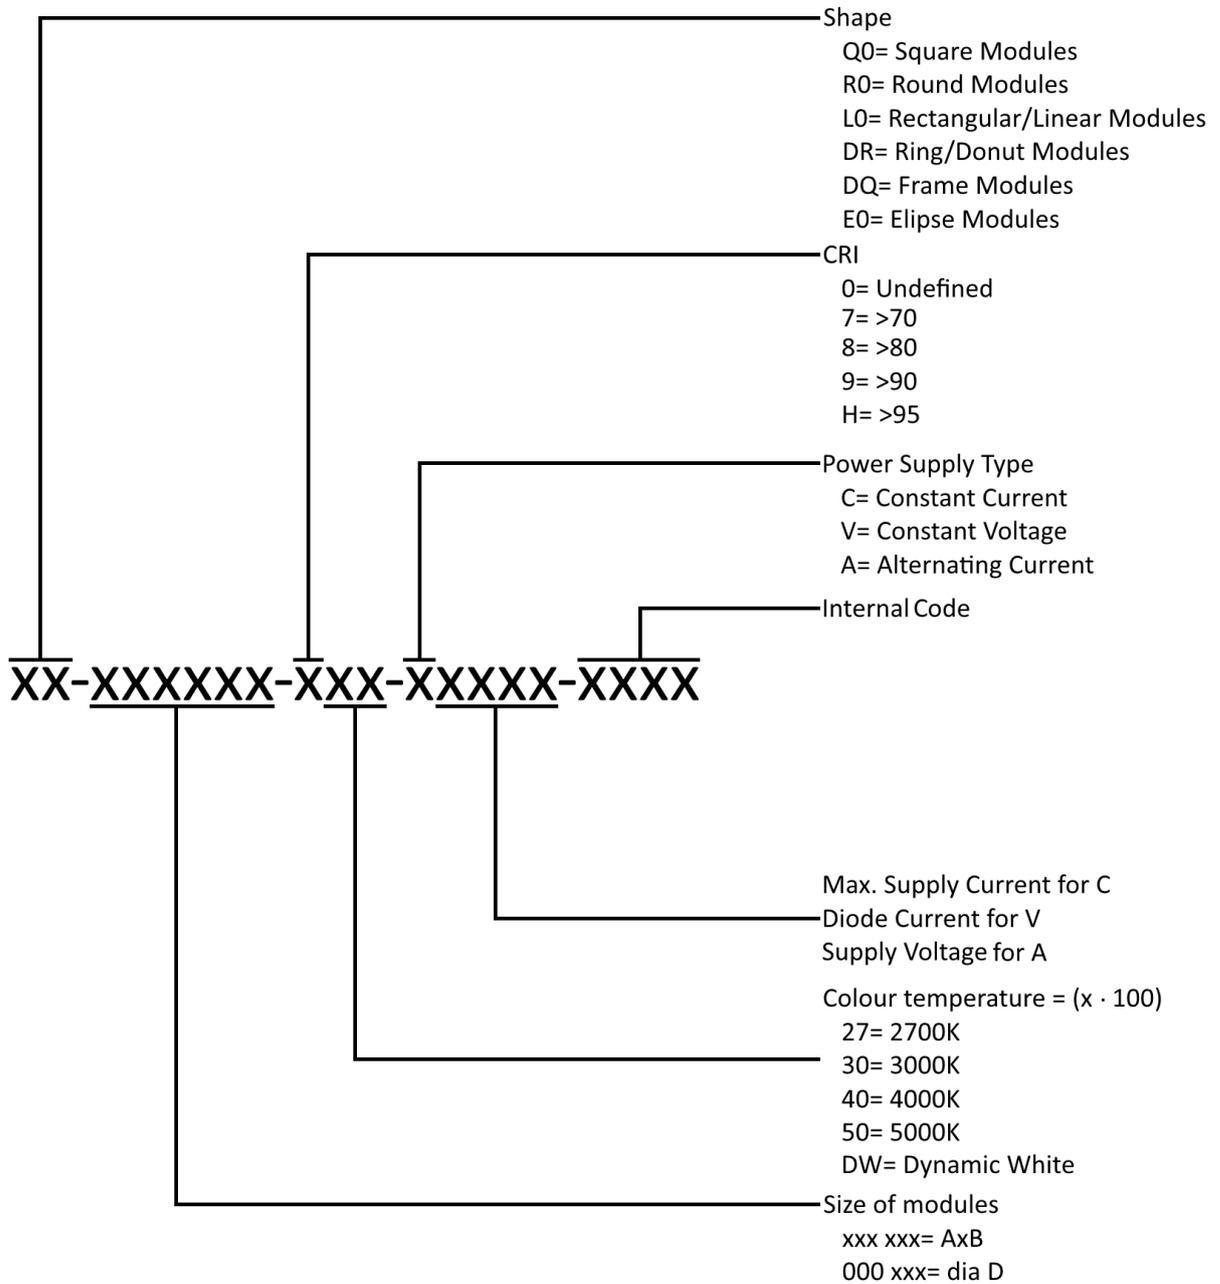

CONTACT

CEZOS

81-534 Gdynia POLAND,

Olgierda 88/b

tel. +48 58 664 88 61

cezos@cezos.com

www.cezos.com

Subject to technical changes and errors.